



LCD Panel Transportation AGV Automated Guided Vehicle Dust-Free Operation Double Side Platform Load 100KG

Our Product Introduction

Basic Information

- Place of Origin: GUANGZHOU
- Brand Name: TIANYUE
- Certification: 3c.ce
- Model Number: TY-MAS-MS100
- Minimum Order Quantity: 1
- Packaging Details: wooden box
- Delivery Time: 60 work days
- Payment Terms: T/T
- Supply Ability: 100



Product Specification

- Motor Way: Servo Motor
- Drive Mode: Mecanum Wheel
- Docking Mod: Telescopic Lift Docking
- Size: Customization
- Power Supply: Lithium Iron Phosphate
- Appearance: Customization
- Load Weight: 100kg
- Shell: Stainless Steel
- Highlight: LCD Panel AGV Automated Guided Vehicle,
Dust-Free AGV Automated Guided Vehicle



More Images





for more products please visit us on roboticsagv.com

Product Description

AGV Automated Guided Vehicle LCD Panel Transportation, Dust-Free Operation, Double Side Platform Load 100KG

Project	Technical Parameters
Product Name	Omnidirectional Side Fork Telescopic Lift Dual Platform AGV
Product Dimensions	L x W x H mm (customizable)
Loading Mode	Side telescopic lift dual-layer platform fork to pick up goods, extension length 1200mm, lifting height 1700mm (customizable)
Load Capacity	50KG per layer (customizable)
Design	Custom design
Control Mode	PLC, Microcontroller (customizable)
Guidance Mode	Laser, QR code, Magnetic stripe (customizable)
Travel Direction	Forward, Backward, Left turn, Right turn, Fork, 360° rotation
Drive Mode	Mecanum wheel drive
Drive Power	750W * 4
Mecanum Wheel Size	11 inches * 4
Drive Power Supply	DC 48V
Travel Speed	Straight: 0-40 m/min, Turn: 0-20 m/min
Repeat Positioning Accuracy	±5mm
Permissible Road Surface Flatness	≤5 mm
Working Mode	Can work continuously for 24 hours
Climbing Ability	≤5%
Charging Mode	Online charging (side charging)
Obstacle Sensor Safety Detection Range	Detection distance: ≤3 m (adjustable), Sensor detection angle: ≤270° (adjustable), Emergency stop distance: < 20 mm
Safety Protection	Front obstacle detection sensor, Dual safety edge anti-collision mechanism, Emergency stop switch
Alarm Mode	Audible and visual alarm, Three-color light, Music horn
Applicable Industries	Semiconductor, 3C electronics, Photovoltaic, Cleanrooms
Battery	Type: Lithium iron phosphate battery, Voltage: 48V, Capacity: 80Ah
Design Life	>10 years

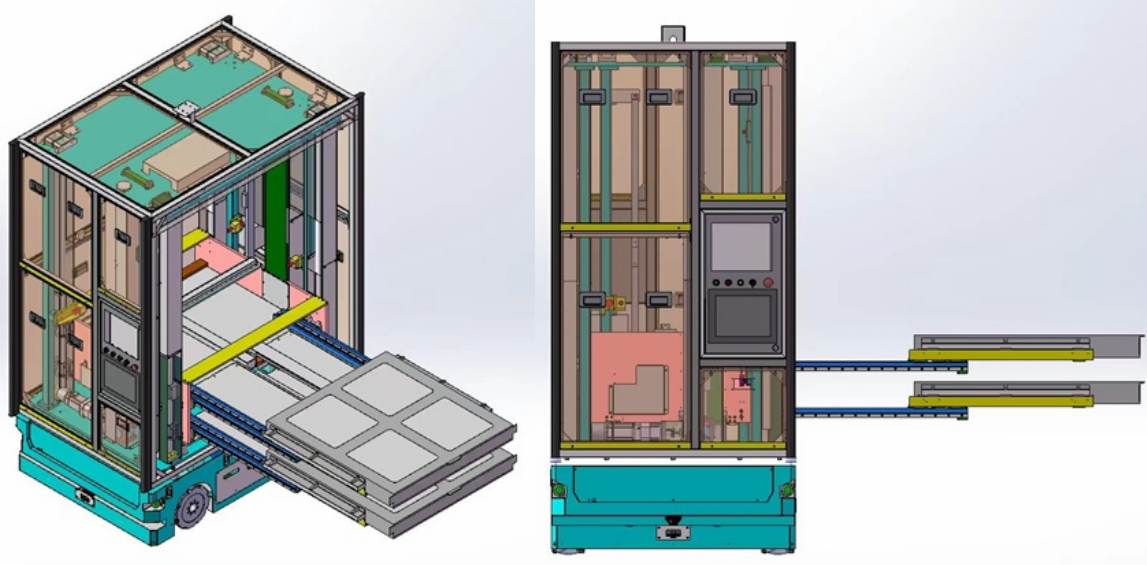

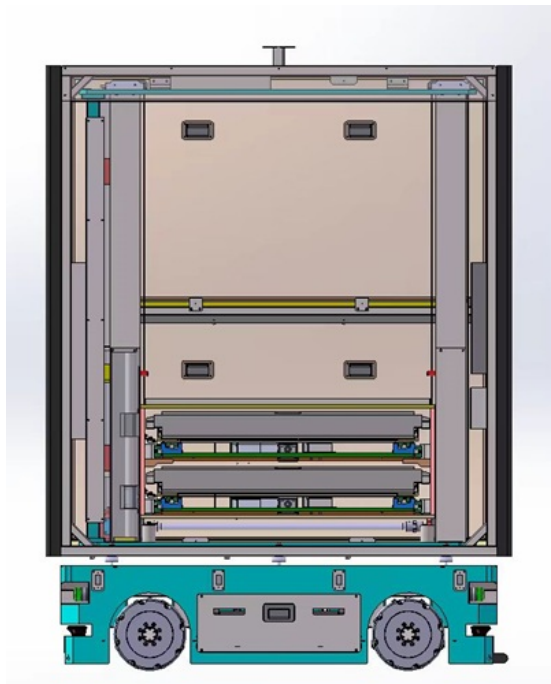

Guangzhou Tianyue Automation Technology Co., Ltd.



13570415240



mkliangjintian@gmail.com



roboticsagv.com

Shop 23,24-101 ,32 Lihong Bei Lu,Jiutan Cun,Huadu District,Guangzhou City,China